



The heart of  
your water system

## WELL-X-TROL TANKS



- ? **Air valve:** located for easier air pressure adjustment
- ? **Butyl Diaphragm:** FDA Certified for drinking water, built in one piece for a uniform distribution of the internal pressures.
- ? **Polypropylene interior lining:** NSF Certified, it gives rigidity to the tank and is 100% corrosion resistant.
- ? **Finish:** resistant paint that beautifies and protects the tank.
- PA (PRO Access) model:** works vertically with a base for ground support. It also has a stainless steel connection that eliminates the use of long tees.  
Maximum working pressure 125 lbs/po<sup>2</sup> (863 kPa)
- PS model:** works horizontally with a universal bracket for a centrifugal pump installation.  
Maximum working pressure 125 lbs/po<sup>2</sup> (863 kPa)



WX-251 PA

WX-202 PA

**5 YEAR WARRANTY**

Part number	Model	Suggested price list	Volume Gal. U.S. (lit.)	Drawdown Gallons U.S. / (Lit.)		
				20 - 40 PSI (138-276 kPa)	30 - 50 PSI (307-345 kPa)	40 - 60 PSI (276-414 kPa)
018-0101	WX-101	100.00*	2 (7.6)	0.7 (2.6)	0.6 (2.3)	0.5 (1.9)
018-0102	WX-102	147.50*	4.4 (16.7)	1.6 (6.1)	1.4 (5.3)	1.2 (4.5)
018-0103	WX-103	237.50*	8.6 (32.6)	2.7 (10.2)	2.3 (8.7)	2.0 (7.6)
018-3201	WX-201	375.00*	14 (53.0)	5.6 (21.2)	4.8 (18.2)	4.1 (15.5)
018-0202	WX-202 PA	362.50*	20 (75.7)	7.4 (28.0)	6.2 (23.5)	5.4 (20.4)
018-0203	WX-203 PA	612.50*	32 (121.1)		10.0 (37.8)	8.6 (32.5)
018-0205	WX-205 PA	782.50*	34 (128.7)	12.6 (47.7)	10.5 (39.8)	9.2 (34.8)
018-0250	WX-250 PA	832.50*	44 (166.6)	16.3 (61.7)	13.6 (51.5)	11.9 (45.0)
018-0251	WX-251 PA	987.50*	62 (234.7)	22.9 (86.7)	19.2 (72.7)	16.7 (63.2)
018-0302	WX-302 PA	1 150.00*	86 (325.5)	31.8 (120.4)	26.7 (101.1)	23.2 (87.8)
018-0350	WX-350 PA	1 605.00*	119 (450.5)	44.2 (167.3)	37.0 (140.1)	32.3 (122.3)
018-1050	WX-105 PS	230.00*	5.5 (20.8)	2.1 (7.9)	1.9 (7.2)	1.7 (6.4)
018-1200	WX-200 PS	367.50*	14 (53.0)	5.2 (19.7)	4.3 (16.3)	3.7 (14.0)

\* = see net price list



The heart of  
your water system

## WELL-X-TROL TANKS

### DIMENSIONS - VERTICAL

Model	Dimension in inches		Dimension in centimeters		Connection inches	Weight lbs (kg)
	Height	Diameter	Height	Diameter		
WX-101	12 ½	8	31.8	20.3	¾" male NPT	5 (2.3)
WX-102	15	11	38.1	28.0	¾" male NPT	9 (4.1)
WX-103	24 ¾	11	62.9	28.0	¾" male NPT	15 (6.8)
WX-104	17 ¾	15 ½	45.1	39.4	1" female NPT	20 (9.0)
WX-201	24	15 ½	60.6	39.4	1" female NPT	25 (11.0)
WX-202 PA	31 ¾	15 ½	80.6	39.4	1" female NPT	33 (14.9)
WX-203 PA	46 ½	15 ½	118.1	39.4	1" female NPT	43 (19.5)
WX-205 PA	29 ¾	22	75.6	55.9	1 ¼" female NPT	61 (27.6)
WX-250 PA	36	22	91.4	55.9	1 ¼" female NPT	69 (31.2)
WX-251 PA	46 ¾	22	118.7	55.9	1 ¼" female NPT	92 (41.6)
WX-302 PA	47 ¼	26	120.0	66.0	1 ¼" female NPT	123 (55.7)
WX-350 PA	62	26	157.5	66.0	1 ¼" female NPT	166 (75.1)

### DIMENSIONS - HORIZONTAL

Model	Dimension in inches			Dimension in centimeters			Connection inches	Weight lbs (kg)
	Height	Length	Width	Height	Length	Width		
WX-105 PS	11	18 ¾	10 ½	28.0	46.4	26.7	¾" male NPT	13 (5.9)
WX-200 PS	16	21	15 ½	40.6	53.3	39.4	1" male NPT	29 (13.1)



The heart of  
your water system

## ELBI TANKS

FEATURES	BENEFITS
<b>Diaphragm type design</b>	Simple and reliable design
<b>Heavy duty Butyl diaphragm</b>	In house diaphragm manufacturing, using injection moulding equipment, to ensure total control of this vital component. Proprietary food quality Butyl compound will not release taste or odor to water which makes it safe for alimentary applications. Solid construction, all diaphragms are QC inspected prior to assembly.
<b>Exclusive TOP-PRO corrosion proofing</b>	Provides a high level of resistance against the corrosive action of water.* Completely phenol-free coating which satisfies government requirements for products designed to contain liquids for human consumption. Resistant to temperatures of up to 93 °C (200 °F)
<b>Protection of water inlet</b>	Plastic insert keeps the diaphragm safe, prevents well water debris from entering the tank.
<b>Protected air valve</b>	Recessed position prevents damage of precharge air valve during shipping and handling. The plastic cap prevents accidental tampering.
<b>Wide open steel base</b>	Allows for an easy installation, does not limit tank position as in case of closed based. Perfect for "T" installation in multiple tank set-up. The open style base provides better aeration, thus reducing condensation and premature rusting.*
<b>Stainless steel elbow</b>	For a better corrosion resistance.



**5 YEAR WARRANTY**

Maximum working pressure  
125 lbs/po<sup>2</sup> (863 kPa)

\*When installed in normal environmental conditions. By normal environmental conditions its is meant environments which are free of acids, scale or chemical deposits or other factors knows to affect paints, coatings and metals.

Part number	Model	Suggested price list	Volume Gal. U.S. (lit.)	Drawdown Gallons U.S. / (Lit.)		
				20 - 40 PSI (138-276 kPa)	30 - 50 PSI (307-345 kPa)	40 - 60 PSI (276-414 kPa)
019-0008	DWT-8	75.00*	2.1 (8)	0.8 (3.0)	0.6 (2.3)	0.5 (1.9)
019-0018	DWT-18	112.50*	5 (18)	1.8 (6.8)	1.5 (5.7)	1.3 (4.9)
019-0025	DWT-25	162.50*	6.5 (25)	2.4 (9.1)	2.0 (7.6)	1.7 (6.4)
019-0050	DWT-50V	237.50*	13.5 (50)	4.9 (18.5)	4.2 (15.9)	3.6 (13.6)
019-0080	DWT-80V	262.50*	21 (80)	7.7 (29.1)	6.5 (24.6)	5.6 (21.2)
019-0100	DWT-100V	387.50*	27 (100)	9.9 (37.4)	8.3 (31.4)	7.2 (27.2)
019-0150	DWT-150V	475.00*	40 (150)	14 (53)	12 (45)	10 (38)
019-0200	DWT-200V	575.00*	53 (200)	21 (79)	17 (64)	15 (57)
019-0300	DWT-300V	737.50*	80 (300)	29 (110)	24 (91)	21 (79)
019-0450	DWT-450V	995.00*	119 (450)	43 (163)	36 (136)	31 (117)
019-0500	DWT-500V	1 350.00*	132 (500)	48 (181)	40 (151)	35 (132)
018-1520	DH-25	137.50*	6.5 (25)	2.4 (9.1)	2.0 (7.6)	1.7 (6.4)
018-1560	DH-50	237.50*	13.5 (50)	4.9 (18.5)	4.2 (15.9)	3.6 (13.6)

\* = see net price list



The heart of  
your water system

## ELBI TANKS

### DIMENSIONS - VERTICAL

Model	Dimension in inches		Dimension in centimeters		Connection inches	Weight lbs (kg)
	Height	Diameter	Height	Diameter		
DWT-8	12	8	30.5	20.3	¾" male NPT	6 (2.7)
DWT-18	16 ¼	11	41.2	28.0	¾" male NPT	12 (5.4)
DWT-25	18 ½	11	47.0	28.0	¾" male NPT	14 (6.3)
DWT-50V	24	16	60.6	40.6	1" female NPT	23 (10.4)
DWT-80V	33	16	83.9	40.6	1" female NPT	45 (20.4)
DWT-100V	31	20	78.7	50.8	1 ¼" female NPT	50 (22.6)
DWT-150V	40	20	101.6	50.8	1 ¼" female NPT	59 (26.7)
DWT-200V	43	24	109.2	61.0	1 ¼" female NPT	90 (40.7)
DWT-300V	48	26	121.9	66.0	1 ¼" female NPT	119 (53.8)
DWT-450V	52	31	132.1	78.7	1 ¼" female NPT	146 (66.1)
DWT-500V	56	31	142.2	78.7	1 ¼" female NPT	176 (79.6)

### DIMENSIONS - HORIZONTAL

Model	Dimension in inches			Dimension in centimeters			Connection inches	Weight lbs (kg)
	Height	Length	Width	Height	Length	Width		
DH-25	19	18	11	48.3	45.7	28.0	¾" male NPT	14 (6.4)
DH-50	18	21	17	45.7	53.3	43.2	1" male NPT	24 (10.9)



The heart of  
your water system

## GALVANIZED TANKS

### CHARACTERISTICS:

- ? Hydro-Pneumatic tank, to store cold water (room temperature) only.
- ? NSF certified for potable water
- ? Galvanized inside and out with zinc for an accrued corrosion resistance.
- ? Made of rolled steel for better resistance.
- ? Maximum working pressure 75 lbs/po<sup>2</sup> (517 kPa)

Part number	Model	Volume U.S. Gallons (liters)	Suggested price list
015-0225	PZ-12	12 (45.4)	365.00*
015-0250	PZ-21	21 (79.5)	377.60*
015-0275	PZ-32	32 (121.1)	410.00*
015-0300	PZ-42-T	42 (159.0)	433.30*
015-0350	PZ-82	82 (310.4)	693.40*
015-0375	PZ-120	120 (454.2)	940.00*



1 YEAR WARRANTY

## "AMTROL" RETENTION EPOXY TANKS

### CHARACTERISTICS:

- ? Hydro-Pneumatic tank, to store cold water (room temperature) only.
- ? Exterior made of rolled steel and painted for a superior corrosion resistance.
- ? Interior made of glass lined which gives an extra protection against corrosion.
- ? Maximum working pressure 75 lbs/po<sup>2</sup> (517 kPa)

Part number	Model	Volume U.S. Gallons (liters)	Suggested price list
013-0250	ERT-42T	42 (159.0)	487.20*
013-0275	ERT-80	82 (310.4)	808.20*
013-0300	ERT-120	120 (454.2)	1 074.00*



1 YEAR WARRANTY

\* = see net price list




The heart of  
your water system

## DIMENSIONS GALVANIZED TANKS

Model	Dimensions in inches						Dimensions in centimeters						holes in inches NPT					Weight lbs (kg)
	A	B	C	D	E	F	A	B	C	D	E	F	G	H	J	K	L	
PZ-12	26 ½	12	13	5	3	-	67.3	30.5	33.0	12.7	7.6	-	1	-	1 ¼	1 ¼	1 ¼	27 (12.2)
PZ-21	27	16	13	5	3	-	68,6	40.6	33.0	12.7	7.6	-	1	-	1 ¼	1 ¼	1 ¼	45 (20.4)
PZ-32	38 ¾	16	13	8	3	-	98,4	40.6	43.2	12.7	7.6	-	1	-	1 ¼	1 ¼	1 ¼	52 (23.5)
PZ-42-T	51	16	17	12	3	-	129,5	40.6	66.0	20.3	7.6	-	1	-	1 ¼	1 ¼	1 ¼	71 (32.1)
PZ-82	63	20	33	12	3	-	160,0	50.8	83.8	30.5	7.6	-	1	-	1 ¼	1 ¼	1 ¼	114 (51.6)
PZ-120	64 ½	24	33	12	3	-	163,8	61.0	83.8	30.5	7.6	-	1	-	1 ¼	1 ¼	1 ½	154 (69.7)

## RETENTION EPOXY TANKS

Model	Dimensions in inches						Dimensions in centimeters						holes in inches NPT					Weight lbs (kg)
	A	B	C	D	E	F	A	B	C	D	E	F	G	H	J	K	L	
ERT-42T	53	16	29	9	9	7	134.6	40,6	73.6	22.9	22.9	17.8	1 ¼	¼	1 ¼	1 ¼	1 ¼	77 (34.8)
ERT-80	64	20	34	8 ½	8 ½	12 ½	162.6	50,8	86.4	21.6	21.6	31.8	1	¼	1 ¼	1 ¼	1 ¼	120 (54.3)
ERT-120	66	24	32	6 ½	6 ½	6	167.6	61,0	81.3	16.5	16.5	15,2	1	¼	1 ¼	1 ¼	1 ¼	160 (72.4)

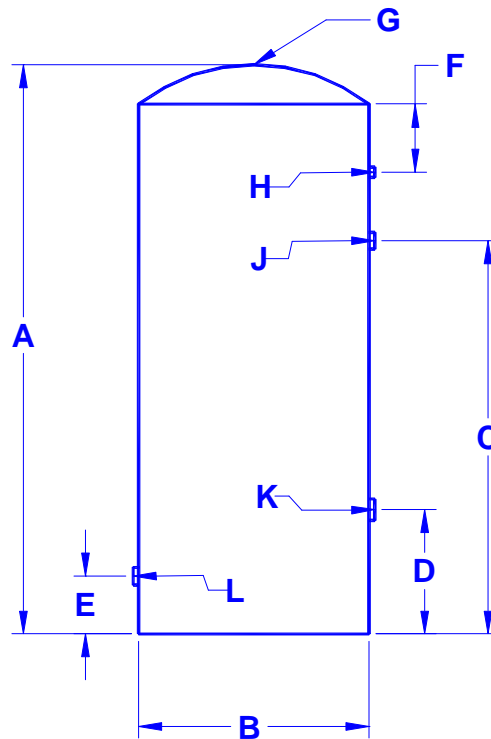

PZ - ERT



The heart of  
your water system

## "WELL MATE" TANKS

- ? **BAG:** made of resistant and durable polyetherurethane (PEU), specially sized for each tank model.
  - ? **CASTING:** made of high-density polyethylene in one piece without welding.
  - ? **EXTERIOR SURFACE :** composed of continuous fiberglass strands, mixed and sealed with a very high quality epoxy resin.
  - ? **BASE:** sturdy, molded in polymeric, corrosion and impact proof.
  - ? **EXIT:** installed at the bottom of the tank, molded with PVC which gives a good impact resistance.
- 
- ? Up to 50% lighter than any other existing tank.
  - ? Trustworthy and corrosion resistant for many years.
  - ? A unique design that gives the air bag a good pressure adjustment versatility.
  - ? The assembled PVC male exit, facilitates installation.
  - ? Maximum working temperature: 120°F (48.9°C)
  - ? Maximum working pressure: 125 PSI (862 kPa)



**5 YEAR WARRANTY**

### ALL MATERIALS ARE NFS AND FDA CERTIFIED

Part number	Model	Volume U.S. Gallons (liters)	Dia (in)	Height (in)	Drawdown Gallons U.S. / (Lit.)		Connection inches	Shipping weight lbs (kg)	Suggested price list
					30 - 50 PSI (307-345 kPa)	40 - 60 PSI (276-414 kPa)			
017-0600	WM-6	19.8 (75.2)	16	32	5.9 (22.4)	5.1 (19.4)	1" male NPT	20 (9)	362.50*
017-0900	WM-9	29.5 (112.1)	16	44	8.9 (33.8)	7.7 (29.3)	1" male NPT	28 (13)	510.00*
017-1200	WM-12	40.3 (153.1)	16	57	12.1 (46.0)	10.5 (39.9)	1" male NPT	34 (15)	825.00*
017-1212	WM-14WB	47.1 (179.0)	22	41	14.1 (53.6)	12.2 (46.4)	1 ¼" male NPT	49 (22)	875.00*
017-2020	WM-20WB	60.0 (228.0)	24	42	18.0 (68.0)	15.6 (59.0)	1 ¼" male NPT	58 (26)	1 045.00*
017-2525	WM-25WB	86.7 (329.5)	24	56	26.0 (98.8)	22.5 (85.5)	1 ¼" male NPT	67 (30)	1 165.00*
017-3535	WM-35WB	119.7 (454.9)	24	74	35.9 (136.4)	31.1 (118.2)	1 ¼" male NPT	98 (44)	1 775.00*
017-3540	UT-40	40 (153)	16	56	<b>RETENTION</b>		1 ¼" female NPT	31 (14)	515.00*
017-3550	UT-80	80 (302)	21	67			1 ¼" female NPT	53 (24)	825.00*
017-3600	UT-120	120 (455)	24	73			1 ¼" female NPT	77 (35)	1 100.00*